

# Coated Steel – Prepainted Data Sheet



August 2018. This literature supersedes all previous issues

# COLORBOND® Stainless steel



## General description

COLORBOND® Stainless prepainted steel by BlueScope, provides our ultimate prepainted product in corrosion resistance and weatherability in exterior applications, typically within 100m of the severe environment.

## Typical uses

Roofing and walling, particularly suited to severe marine and industrial environments. To determine if warranties apply or for material selection advice, please visit [colorbond.com](http://colorbond.com) and [steel.com.au](http://steel.com.au) or contact Steel Direct for advice.

## Australian and International standards


Paint Coating - AS/NZS 2728 Type 6  
Substrate - JIS G 4305 SUS 430 (Japanese Standard)  
ISO 9001 Quality System certified

## Preferred substrates

Grade 430 Stainless Steel available in 0.42 x 940 and 0.55 x 1200. {Refer Substrate Properties Table and Note 8}

*Please refer to current price list or BlueScope State Sales Office for availability of colours and dimensions.*

*CORSTRIP® protective film may be available on request {Refer Note 3}*

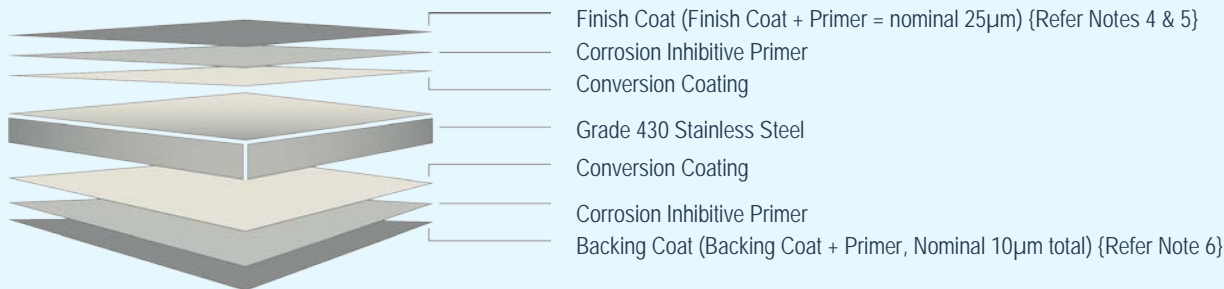

## Attributes tested during manufacture

Property	Test & Evaluation Method(s)	Results
<b>Adhesion</b>		
Reverse Impact	AS/NZS 2728 (App. E)	≥10 joules
T-bend	AS/NZS 2728 (App. F)	Maximum 6T. Refer Note 7.
<b>Hardness</b>		
Pencil	AS/NZS 1580 405.1	B or harder
<b>Specular Gloss</b>		
60° meter	AS/NZS 1580 602.2; ASTM D523 (test & eval)	Nominal ± 10 units

Product Attributes

Property	Test & Evaluation Method(s)	Results
<b>Flexibility</b>		
T-bend	ASTM D4145	Maximum 5T (no cracking). Refer Note 7
<b>Resistance to abrasion</b>		
Scratch	AS2331.4.7	Typically 2000g
<b>Adhesion</b>		
Natural well washed exposure (10 yrs)	AS/NZS 1580.457.1	No flaking or peeling. Refer Notes 9 & 10
<b>Resistance to humidity</b>		
Cleveland (500 hours)	ASTM D4585; AS/NZS1580.481.1.9 (Blisters); AS/NZS 1580.408.4 (Adhesion)	Blister density: ≤3. Blister size: ≤S2. No loss of adhesion or corrosion.
<b>Resistance to corrosion</b>		
QFog (2000 hours)	AS/NZS 1580.481.1.9 (Blisters); AS1580.408.4 (Adhesion), AS1580.481.3 (undercutting, Corrosion)	Blister density: ≤2. Blister size: ≤S2. Undercut from score: ≤1mm. No loss of adhesion or corrosion of base metal. Refer Note 2.
<b>Resistance to colour change</b>		
Natural well washed exposure (10 yrs)	AS/NZS 1580.457.1 & ASTM D2244 (Colour)	ΔE CIElab 2000: Light colour: ≤3 units; Intermediate colour: ≤3.5 units; Dark colour ≤5 units. Refers Notes 9& 10.
QUV (2000 hours)	ASTM G154 & ASTM D2244 (Colour)	ΔE CIElab 2000: Intermediate colour ≤1 unit
<b>Resistance to chalking</b>		
Natural well washed exposure (20 yrs)	AS/NZS 1580.457.1 & AS/NZS 1580 481.1.11 (Chalk Method B)	Chalk rating: ≤2. Refer Notes 9 & 10
QUV (2000 hours)	ASTM G154 & AS/NZS 1580 481.1.11 (Chalk Method B)	Chalk rating: 0 - 1 range
<b>Resistance to solvents, acids, alkalis</b>		
Exposure	ASTM D1308 (3.1.1) & ASTM D2244 (Colour); AS/NZS 1580.481.9 (Blisters)	No discolouration or blistering. Refer Notes 2, 9 & 11
<b>Resistance to fire</b>		
Fire test performance	AS/NZS 1530.3	Ignitability index: 0 rating in scale of 0-20 Spread of flame index: 0 rating in scale of 0-10 Heat evolved index: 0 rating in scale of 0-10 Smoke developed index: 1 rating in scale of 0- 10
NCC Non-Combustible Material Deemed-to-Satisfy Provisions	National Construction Code, Building Code of Australia Volume 1 Part C1.12.e, and Volume 2: Part 3.7.1.2.e	May be used wherever a non-combustible material is required.
<b>Resistance to heat</b>		
Exposure 100°C continuous (500 hrs)	ASTM D2244 (Colour)	Colour change ΔE CIElab 2000: ≤3 units

Substrate Properties

Property	0.42 x 940	0.55 x 1200
Tensile Strength	Minimum 580 MPa	Minimum 450 MPa
Chemistry and other properties are as per JIS G 4305 (SUS 430)		

### Important notes

1. All warranties for a product, if any, are subject to eligibility. Terms and conditions apply. Nothing in this document is intended by BlueScope to extend, modify or otherwise affect any stated product warranty. To find out more, please visit the BlueScope website or contact Steel Direct for advice.
2. For selection of the most appropriate COLORBOND® steel product, please refer to technical bulletins TB1a, TB1b, TB19, CTB16, CTB21 and CTB22. Before purchase, you should check on suitability by contacting your nearest BlueScope Sales office for advice.
3. The CORSTRIP® protective film should be removed from the painted steel strip immediately on installation. Sunlight can increase adhesion of the protective film to the painted surface if left uncovered outside.
4. Finish Coat - the coating applied to the exposed surface of the prepainted coil which is expected to meet the Performance Requirements.
5. The product is supplied with a nominal 25 unit (60°) gloss Finish Coat
6. Backing Coat – a thin coating applied to the reverse surface of the prepainted coil. It also gives additional durability to the reverse surface during the service life of the product, but for aesthetic reasons is not recommended for exposure to sunlight. Performance Requirements are generally not applicable to Backing Coats. Where specific Performance Requirements are deemed necessary for the reverse surface coating, a “double sided” product should be specified, in which case a topcoat of full nominal thickness will be applied.
7. The minimal internal bend diameters for forming processes to achieve no paint cracking (visible using x10 magnification) and to avoid paint adhesion issues are specified by the T-bend flexibility and T-bend adhesion results respectively – where 1T equals the total coated thickness (tct) in mm of the material. These results are based on testing at 20-25°C.
8. For most products, the metallurgical ageing process which is inherent in the paint stoving cycle will result in some loss of ductility compared with unpainted product. However, minimum strength levels designated by relevant standards will still be applicable.
9. Improper storage or use of non-approved roll-forming lubricants may cause brand transfer and paint blushing, and may adversely affect colour and long term durability. Product in coil or sheet pack form must be kept dry. If the coil or sheet pack becomes wet, it must be separated and dried (refer AS/NZS 2728 Appendix L, and also Technical Bulletin TB7). Contact Steel Direct to obtain advice on appropriate rollforming lubricants.
10. Values quoted are for panels expose in accordance with AS/NZS 2728. Variations for in-situ performance may occur due to complexity of building design and location.
11. COLORBOND® Stainless steel has good resistance to accidental spillage of solvents such as methylated spirits, white spirit, mineral turpentine, toluene, trichloroethylene and dilute mineral acids and alkalis. However, all spillages should be immediately removed by water washing and drying.

Colorbond®

colorbond.com

steel.com.au

To learn more about this product

1800 064 384

For more information call Steel Direct

